




AUTOCOOL: Secure Refrigerated Storage


Specification Sheet

AutoCool™ delivers access-controlled refrigerated storage and automated dispensing for your valuable refrigerated medications. It enables centralized control and reporting, and is scalable to accommodate expanding needs and satellite locations.

AUTOCOOL: Specifications

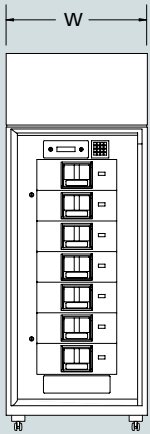

[front view]

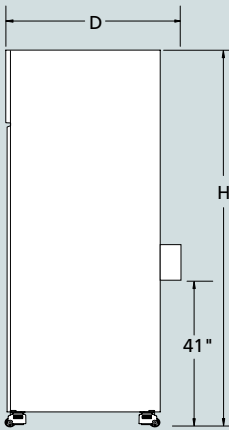

[side view]

DIMENSIONS

Width: 31.0"

Depth: 38.5"

Height: 82.0"

Weight: 750 lbs/340 kg

Improved Patient Safety

AutoCool™ supports bar code confirmation of all stocking, picking, and dispensing activities for your refrigerated medications. It limits personnel actions through password security, secured doors, and medication-specific access.

Complete Inventory Control

AutoCool can consolidate your refrigerated medications as a part of a comprehensive, integrated inventory system. It enables easy, centralized control and perpetual inventory management based on par-levels, and supports integrated wholesale ordering.

Enhanced Efficiency

Automated temperature and humidity reports make centralized monitoring easy, even for remote units. Multiple units can be linked together for increased storage, and AutoCool can help synchronize all fulfillment activities when used with Talyst AutoCarousel™ and AutoPack™.

AutoCool integrates with Talyst AutoPharm®3, the powerful software platform that enables complete management of your medication inventory from arrival at the pharmacy to delivery to the patient care area.

CAPACITY

Number of Shelves: 7

Number of Totes per Shelf: 12

Total Number of Totes: 84

Volume per Tote: 2.21 liters

Total Capacity by Volume: 185.6 liters

FEATURES

Digital Temperature Display

Automatic Temperature & Humidity Logging

Locking Heavy-Duty Casters

Expansion Valve Refrigeration System for Quick Recovery After Access

Color: Talyst Grey

Lockable Front Door: Yes

Operation Display: Yes

OPERATION

Uniform Internal Temperature: 2° to 4°C

Number of Thermistors: 2

Number of Compressors: 1

Refrigerant: R-134 A

Environment Temperature: 15° to 35°C

Environment Humidity: 20% to 70%

Workstation Required: Yes

Workstation Operating System: Windows XP or Vista

POWER

Main Power: 115 VAC 20A 1-Phase

Required: NEMA 5-20R Receptacle

Duty Cycle: 100%

Manual Operation, if Needed: Yes

Note: The AutoCool is UL/CSA Compliant.

AUTOCOOL: Site Requirements

CLEARANCE REQUIRED:

Right & Left Sides: 9.0"

Back: 12.0"

Top: 6.0"

Prior to installation, a site survey will be completed to ensure there are no physical obstructions that would affect installation.